

- Chrome
- Single-lever, Swivel Spout (Swivel range • limiting option)
- Hot & Cold Symbols
- Limitation option for maximum temperature and flow rate, adjustable hot water stop (retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid • installation system

Flow rate at 300kPa 7.5 L/min Hot Water Supply max. +80°C 0.5 - 10 bar Working Pressure **Connection Size** G1/2


Angle Valves: 2 x SC7103 15 50001 Female OR

2 x 97037000 Male

DESIGNED AND ENGINEERED IN GERMANY MANUFACTURED IN EUROPE





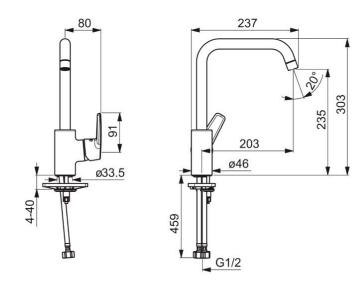

RANKLIN OVATIVE PLUMBING SOLUTIONS