


- Self-closing
 - Shower panel made from solid extruded aluminium profile with high quality anodized surface and integrated SCHELL shower fitting.
 - Type LINUS D-SC.
 - Assembly-and service-friendly due to the pivoting front panel, suitable for connections from the rear and for wall-mounted connections from above.
 - LINUS DP-SC-M, selfclosing - mixed water, with low-aerosol shower head, $20^\circ \pm 6^\circ$
 - Panel with pre-assembled LINUS shower fitting with integrated self-closing cartridge SC including piping between fitting and shower head connection
 - Operating button SC
 - 2 backflow preventers (BP, DIN EN 1717: EB)
 - Shower head
 - Fastening material
 - Connection accessories
-
- Shower head: flow rate max. 9 l/min independent of pressure
 - Flow pressure: 1,0 - 5,0 bar
 - Water temperature max. 70 °C (short-time-use)
 - Time setting: 5 - 30 s
 - Dimensions: 1200 mm x 226 mm x 115 mm
 - Panel is ready for connection to existing wall-mounted connections from the rear and wall-mounted supply lines from above
-
- Material: Panel made of aluminium / water path out of dezincification resistant brass conform German drinking water regulation / operation out of brass, chrome-plated



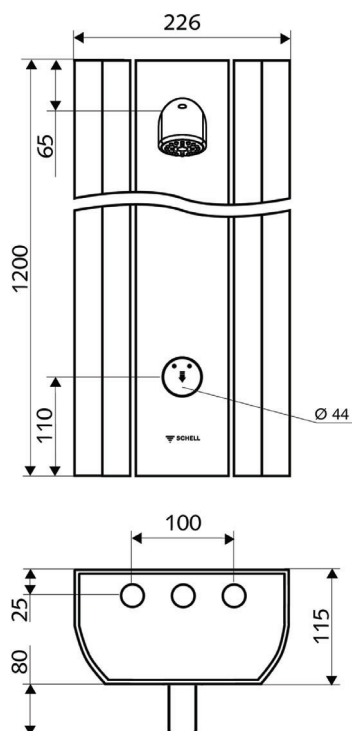

- Surface: alu anodized
- Weight: 15.3 kg/pc.
- Packaging unit: 1
- Dimension: DN 15 G 1/2 ext. thread
- VERSIONS:
 - Dimension: DN 15 G 1/2 ext. thread
LINUS DP-SC-M, function: selfclosing - mixed water, with shower head COMFORT, 13°, alu anodized, PU 1, W: 14.3 kg/pc.
Order No.: 00 803 08 99
 - Dimension: DN 15 G 1/2 ext. thread
LINUS DP-SC-V, function: selfclosing - premixed water, with shower head COMFORT, 13°, alu anodized, PU 1, W: 14 kg/pc.
Order No.: 00 804 08 99
 - Dimension: DN 15 G 1/2 ext. thread
LINUS DP-SC-V, selfclosing - premixed water, with low-aerosol shower head, 20° ±6°, alu anodized, PU 1, W: 15 kg/pc.
Order No.: 00 827 08 99
- RECOMMENDED ASSOCIATED ITEM:
 - Soap tray LINUS Order No.: 00 809 08 99
 - Shower panel connection pipe set, length 500mm
Order No.: 08 481 06 99 or
 - Shower panel connection pipe set, length 1000 mm Order No.: 08 482 06 99
 - Connection cover LINUS shower panel, installation length 150-450 mm
Order No.: 00 810 08 99 or
 - Connection cover LINUS shower panel, installation length 451-950 mm
Order No.: 00 812 08 99

 DESIGNED AND MANUFACTURED IN GERMANY

